

## BOSCH CONDENSING HYDRONIC BOILER

MANUFACTURED BY:



Wall hung condensing hydronic system boiler for indoor or outdoor installation

Features:

- 18 kW and 30 kW system boiler for heating only
- Wall mounted – space saving
- Easy installation and servicing
- Available in Natural and LP Gas
- Aluminium/silicon heat exchanger
- Fully electronic safety management and fault diagnostics
- Optional room thermostats available
- Quiet operation (42 – 45 dB)



**7 YEAR\***  
**WARRANTY**



### MODELS

System 18 & System 30  
Internal & External

### MEASUREMENTS

18kW - 700 x 400 x 330 mm  
30kW - 750 x 450 x 360 mm  
External - 1000 x 500 x 400 mm



Made in Germany



Approved by the National Asthma Councils Sensitive Choice Program



**HUNT HEATING**  
**The smart choice.**

### MAGNACLEAN FILTER



### WATER TREATMENT



### SHOWROOM

11 Fiveways Boulevard  
Keysborough  
VIC 3173

PHONE 1300 00 1800


FAX (+613) 9798 5133

enquiries@huntheat.com.au

[www.huntheat.com.au](http://www.huntheat.com.au)



SPECIFICATIONS		
	18 kW	30 kW
Ignition	Electronic	Electronic
Installation	Internal or External	Internal or External
Gas type	NG / LPG	NG / LPG
Nominal Gas Consumption (NG & LPG) (Mj/H) - Central Heating (CH)	75	130
Energy efficiency at 80°C (CH supply temp)	91%	91%
Gas supply pressure (kPa)	1.13 (NG) / 2.75 (LPG)	1.13 (NG) / 2.75 (LPG)
Expansion tank (ltr)	8	10
Minimum Working Water Pressure (kPa)	100	100
Maximum Working Water Pressure (kPa)	265	265
Net Weight (kg)	27.1	46.5
<b>General Data</b>		
<b>Dimensions - Internal</b>		
Height (mm)	700	750
Width (mm)	400	440
Depth (mm)	330	360
<b>Dimensions - External</b>		
Height (mm)	1000	1000
Width (mm)	500	500
Depth (mm)	400	400

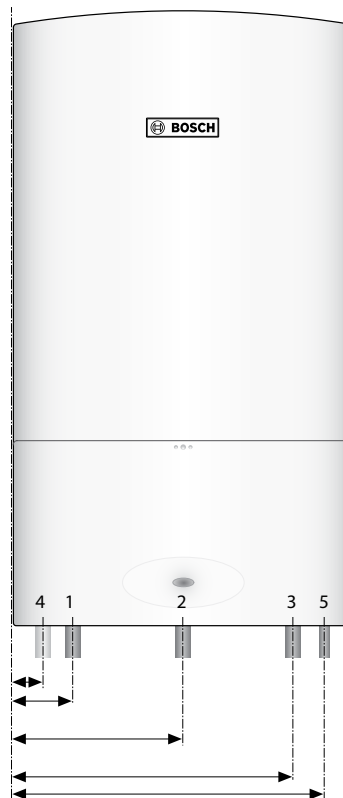

Function		From left of case	Pipe connections diameter
1	CH Flow	70 mm	3/4" BSP
2	Gas	200 mm	3/4" BSP
3	CH Return	330 mm	3/4" BSP
4	Condensate	35 mm	22 mm
5	Pressure relief valve	367 mm	1/2" BSP

